

EAST - [default.wsp:1]

FileViewEditToolsWindowHelp

IG&R:

BRS:

IS&R:

BRS:

BRS:

BRS:

BRS:

Ⓢ Pending

Ⓢ Active

Ⓢ L2: (2548) anticorrosion

Ⓢ L3: (59617) polyurethane adj foam

Ⓢ L4: (1) ("19544121") .PN.

Ⓢ L1: (52) anticorrosion

Ⓢ L5: (1) ("19544121") .PN.

Ⓢ L6: (1) 15

Ⓢ L7: (4) ("4242463") .PN.

Ⓢ L8: (26) ozone adj inhibitor

Ⓢ L9: (91) ozone adj inhibits

Ⓢ L10: (6660) dimer adj acid

Ⓢ L11: (1693) polyester adj polyol

Ⓢ L13: (2) 12 and 112

Ⓢ L12: (298) 110 same 111

Ⓢ L14: (157148) antioxidant

Ⓢ L16: (2) 12 and 115

Ⓢ L15: (137) 112 and 114

Ⓢ L17: (8977) irganox

Ⓢ L18: (37) 118 and 117

Ⓢ Failed

EAST

(13) It has now been found that the above and related objects of the present invention are provided by a copolyester of at least one aromatic dicarboxylic acid member, at least one dimer acid, at least one C.sub.2 --C.sub.10 glycol, and at least one polyester polyol member utilized as a chain extender. The aromatic dicarboxylic acid member is a symmetrical aromatic dicarboxylic acid or an acid functioning derivative thereof, and is preferably terephthalic acid or dimethyl terephthalate. The dimer acid is preferably a dimerized unsaturated fatty acid, a hydrogenated derivative thereof, or an acid-functioning derivative of either; and the C.sub.2 --C.sub.10 glycol is preferably 1,4-butanediol or 1,6-hexanediol.

(14) The chain extending polyester polyol member is either a polycaprolactone polyol having a molecular weight of from about 500 to about 5,000 and a functionality greater than 2, or a mixture of a polycaprolactone diol having a molecular weight of from about 350 to about 5,000 and a non-polymeric polyol having a functionality greater than 2. The polycaprolactone polyol is present in an amount from about 1 to about 6 mole percent of the total dicarboxylic acid members in the copolyester, and the polycaprolactone diol and the non-polymeric polyol are each present in the mixture in an amount from about 1 to about 6 mole percent of the total dicarboxylic acid members in the copolyester.

(15) The thermoplastic copolyesters of the present invention are characterized by a melting temperature greater than 70 degree C and a glass transition temperature less than 25 degree C, and are prepared by forming an intermediate copolyester of the aromatic dicarboxylic acid member, the dimer acid and the C.sub.2 --C.sub.10 glycol, and chain extending the intermediate copolyester by reaction thereof with the polyester polyol member for about 1-6

	U	1	Document ID	Issue Date	Pages	Title	Current OR	Current Ref	Patentval C	Inventor					
28	<input type="checkbox"/>	<input type="checkbox"/>	US 4510755 A	19890307	12	Polyester graft copolymers, flexible coating	525/440	525/131; 525/167;		Ryntz; Rose A.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
29	<input type="checkbox"/>	<input type="checkbox"/>	US 4504732 A	19890214	15	Polysiloxane graft copolymers, flexible coating	528/28	525/474; 525/476;		Ryntz; Rose A. et al.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
30	<input type="checkbox"/>	<input type="checkbox"/>	US 4766185 A	19950523	15	Polysiloxane graft copolymers, flexible coating	525/475	528/24; 528/26;		Ryntz; Rose A. et al.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
31	<input type="checkbox"/>	<input type="checkbox"/>	US 4754014 A	19880628	15	Polysiloxane graft copolymers, flexible coating	528/28	525/474; 525/476;		Ryntz; Rose A. et al.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
32	<input type="checkbox"/>	<input type="checkbox"/>	US 4673718 A	19870616	15	Polysiloxane graft copolymers, flexible coating	525/476	525/474; 525/477;		Ryntz; Rose A. et al.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
33	<input type="checkbox"/>	<input type="checkbox"/>	US 4588787 A	19860513	7	Flexible two component urethane coating	525/440	525/454; 525/457		Kordomenos; Panagiotis I. et al.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
34	<input type="checkbox"/>	<input type="checkbox"/>	US 4576855 A	19860318	11	Coating composition and skinned polyurethane foam	428/215	428/318.6; 428/318.8;		Okina; Toyohiko et al.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
35	<input type="checkbox"/>	<input type="checkbox"/>	US 4533703 A	19850806	10	Flexible basecoat/two component clearcoat coating	525/440	427/407.1; 427/409;		Kordomenos; Panagiotis I. et al.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
36	<input type="checkbox"/>	<input type="checkbox"/>	US 4530976 A	19850723	8	Flexible uni-basecoat/two component clearcoat coating	525/440	428/423.1; 428/423.7;		Kordomenos; Panagiotis I. et al.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
37	<input type="checkbox"/>	<input type="checkbox"/>	US 3973323 A	19760517	9	Copolyesters, method of manufacturing same, and hot	525/411	523/107; 525/415;		Georgiadis; Paul C. et al.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Ⓢ HTML

Ready

PR34



Search:

[Settings](#)

[« Back](#)

[www.cibac.com/irganox\\_1010-2](http://www.cibac.com/irganox_1010-2) | [Save](#)

[Remove Preview](#)

**Ciba**

Value beyond chemistry

  
 → Regist  
 → Passw

|  |  |  |  |  |  |  |  |

Paints & Coatings » Solution Finder

[← Back to Solution Finder](#)


## Solution Finder/Your Search Criteria

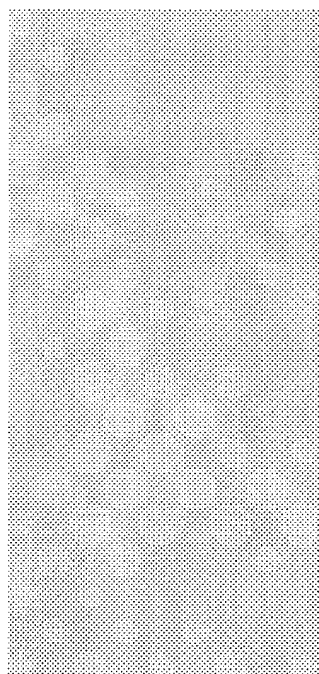
Applications	Technologies	Effects	Prod:
Automotive Coatings	UV-curing	Brightening	Algici
General Industrial	Water-borne	Catalysis	Antio:
Coatings	Powder Coatings	Color	Dispe
Architectural Coatings	Solvent-borne	Dispersion	Dyest
Wood Coatings	High solids	Durability	Effect
Plastic Coatings		Protection	Light:
Adhesives		Rheology Control	Optic:
			Photo
			Pigme
			Pigme
			Rheol

Preview:

Prod

no selection

no se

**Ciba® IRGANOX® 1010**

Ciba® IRGANOX® 1010 offers extreme protection against overbake yellowing by terminating free radicals in conventional solvent-based and powder coating systems. Ciba® IRGANOX® anti-oxidants are phenolic based anti-oxidants that hinder therm oxidation of polymers where high temperature applications are used.

Unlike hindered amines, anti-oxidants are consumed - and not regenerated - in the

stabilization process.



Copyright © Ciba Specialty Chemicals, 2000-2005 | 23. June 2005 | Legal Disclaimer | F